


NOTES:

1. CABINET TO BE SEALED AROUND BOTTOM PERIMETER WITH A 10mm THICK BY 65mm WIDE NEOPRENE GASKET. GASKET TO HAVE A DUROMETER HARDNESS OF 45 AND TO BE PROVIDED WITH ADHESIVE BACKING FOR ATTACHMENT TO THE CABINET.
2. CABINET TO BE SECURED TO THE PAD, ACCURATELY CENTERED OVER ACCESS OPENING, WITH 16mm dia X 38mm LONG STAINLESS STEEL HEXAGONAL HEAD MACHINE BOLTS, LOCK WASHERS AND NUTS. LOCATION OF BOLTS TO BE AS PER MANUFACTURE'S INSTRUCTIONS.
3. FOR NUMBERS, SIZES AND ORIENTATION OF CONDUITS ENTERING TEMPORARY BASE REFER TO CONTRACT DRAWINGS.
4. FOR LOCATION AND ORIENTATION OF CABINET, TEMPORARY FOOTING, REFER TO CONTRACT DRAWINGS.



ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE NOTED.

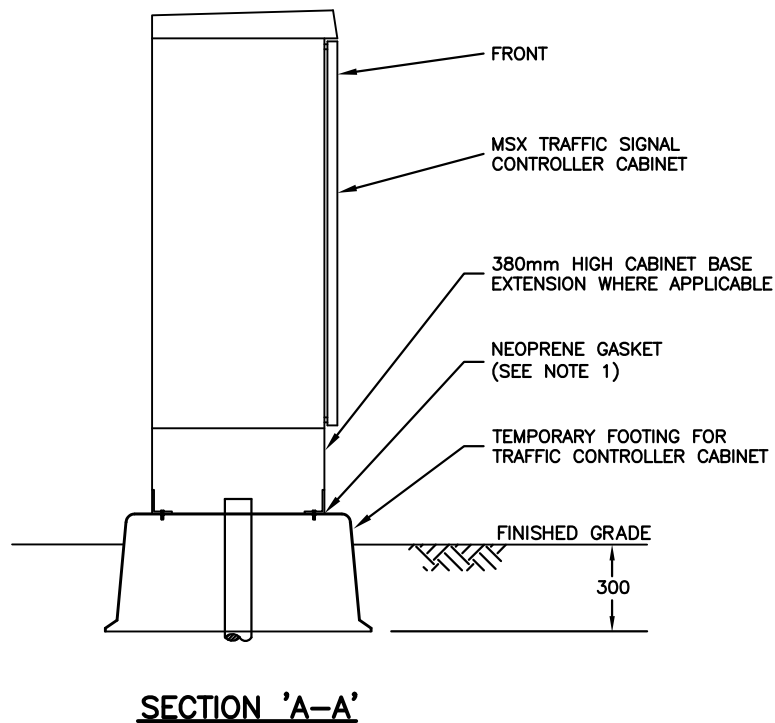

WORKS DEPARTMENT

**TRAFFIC SIGNAL CONTROLLER CABINET
INSTALLATION ON TEMPORARY FOOTING**

DWG. DATE: 2008 04
REVISION NO.: 2
REV. DATE: 2017 04
SCALE: N.T.S.

S-410.082